

ERSP - SIDE PANEL (Note this is a 2 person assembly)

1. Take the wall channel (A) and position it 10mm from the side edge of the tray making sure they are vertical and plumb. Mark the fixing positions and drill for the wall plugs (x3) with an appropriate drill bit. Fit the wall plugs. Take care to avoid any hidden pipes or electrical cables. (Fig 1)

THE WALL CHANNEL & FITTINGS ARE SUPPLIED WITH THE ENCLOSURE

2. Slide the wall channel onto the side panel and carefully lift into position. Fix the wall channel using the 30mm screws supplied with the enclosure.
3. Locate the side panel front profile into the enclosure profile (Fig 2) and adjust in the wall channel as required.

4. Once aligned, drill x2 holes 150mm from the top & bottom on the inside of the enclosure with a 3.2mm drill bit through the wall channel and frame (Fig 3). Secure by using the 10mm screws making sure the support cups are used.

5. On the inside of the side panel front profile, drill x2 holes 150mm from the top & bottom of the enclosure with a 3.2mm drill bit (Fig 4). Drill through the side panel profile and enclosure profile taking care not to drill through the front face of the enclosure. Secure by using the 10mm screws making sure the support cups are used.

6. Apply silicone down the vertical edges of the wall channel and along the bottom edge of the side panel (Fig 5).

DO NOT SEAL THE SIDE PANEL ON THE INSIDE OF THE TRAY!

Finish off by fitting the screw cover caps.

Fig 1



Fig 2

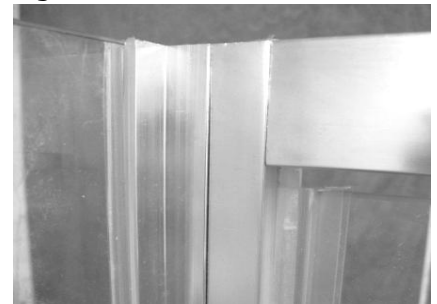


Fig 3




Fig 4



Fig 5





PARTS LIST		
A	SIDE PANEL	x1

FITTINGS LIST		
	10mm SCREWS	2
	INNER SUPPORT CUPS	2
	SCREW COVER CAP	2